

Hydro High Wall

YHH 15 to 50

A range from 1.4 to 4.0 kW



Infrared Remote Control



Wired Control



Features

- Wired control or infrared control
- Automatic Air Sweep
- Integrated Valve kit
- Condensate pump (accessory)
- Stylish front cover
- Master-Slave control

Infrared remote control

- Wireless
- 5 operation modes (Cool/Heat/Auto/Dry/Fan)
- Sleep Mode
- Room Temperature setting
- Fan speed selection
- Timer
- LCD display
- LED Diagnostic function in the unit

Wired control

- 5 operation modes (Cool/Heat/Auto/Dry/Fan)
- Room temperature Display and setting
- Fan speed selector (Auto, low, medium and high)
- Possible to use with the infrared controller
- Weekly timer
- Master/Slave Function



Valve kit

- 3 way valve
- Flexible water connections
- Insulated flexible pipes



Condensate pump AMP01C

Hydro High Wall



Technical features


Model		YHH 15	YHH 30	YHH 50
Cooling capacity	W	1.4	2.3	4.0
Sensible capacity	W	1.0	1.5	2.5
Heating capacity	W	2.2	3.2	5.7
Air flow (H / M / L)	m ³ /h	360 / 240 / 150	474 / 318 / 198	648 / 450 / 264
Electrical data				
Power supply	V/Ph/Hz	230 / 1 / 50 + E		
Power input	W	28	41	58
	A	0.12	0.18	0.25
Noise level				
Sound pressure level at 1 m (L / M / H)	dB(A)	32 / 34 / 35	32 / 35 / 38	39 / 42 / 45
Dimensions and weight				
Height	mm	270	320	330
Width	mm	870	1 030	1 160
Depth	mm	176	196	198
Weight	kg	11.5	13.5	16.5

Cooling capacities based on 7°C EWT Δt 5°C Indoor temperature 27°C DB / 19°C WB
 Heating capacities based on 50°C EWT at nominal flow rate Indoor temperature 20°C

Compatibility table / Codes

Model	YHH 15	YHH 30	YHH 50
Wired control	•	•	•
Condensate pump	•	•	•

Dimensions

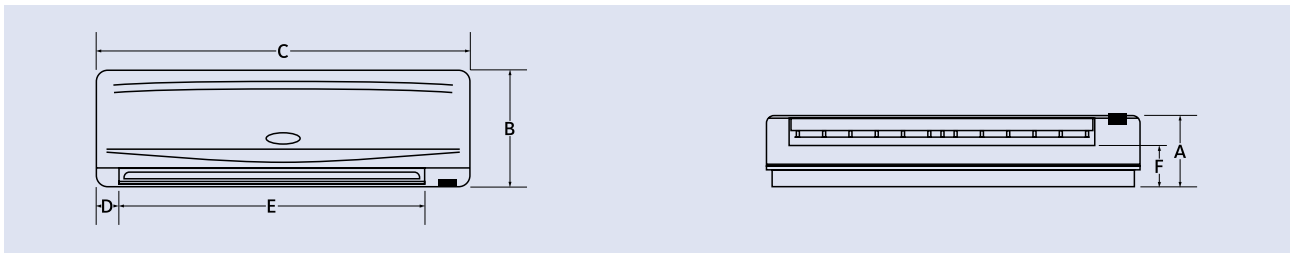

Model	YHH 15	YHH 30	YHH 50
A	176	196	198
B	270	320	330
C	870	1030	1160
D	58	50	58
E	696	813	916
F	87	100	110